


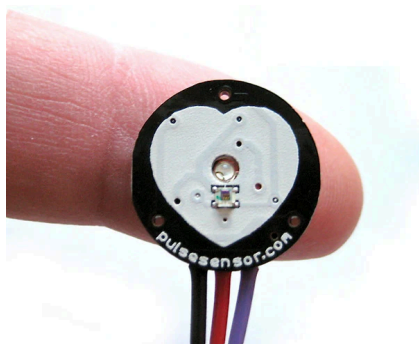

# PulseSensor Datasheet

THE EASY TO USE HEART RATE SENSOR & KIT

## Table of Contents

|                                                                             |           |
|-----------------------------------------------------------------------------|-----------|
| Table of Contents.....                                                      | 1         |
| <b>Introduction.....</b>                                                    | <b>2</b>  |
| Technical Overview.....                                                     | 2         |
| Key Features.....                                                           | 2         |
| <b>The Kit Includes.....</b>                                                | <b>3</b>  |
| Required Electrical Insulation Included.....                                | 3         |
| Vinyl Dots:.....                                                            | 3         |
| Velcro Strip: Use the Velcro Strip to wear the sensor on a finger tip.....  | 4         |
| Ear Clip: Or attach the sensor to the included ear clip using hot glue..... | 4         |
| <b>Pin Out/Connector Configuration.....</b>                                 | <b>5</b>  |
| Electrical Specifications.....                                              | 5         |
| <b>Physical Dimensions.....</b>                                             | <b>6</b>  |
| <b>Circuit Diagrams.....</b>                                                | <b>7</b>  |
| Solderless Breadboard Circuit Diagram.....                                  | 7         |
| micro:bit Wiring Diagram.....                                               | 7         |
| Arduino Circuit Application Diagrams.....                                   | 8         |
| Arduino board Uno Diagram.....                                              | 8         |
| ESP32 BPM WiFi Server circuit diagram.....                                  | 8         |
| nRF52 BLE Heart Rate Monitor circuit diagram.....                           | 8         |
| <b>Arduino Software Library 2.3.x.....</b>                                  | <b>9</b>  |
| Playground Library 2.3.x.....                                               | 9         |
| Software Visualizers.....                                                   | 10        |
| Arduino Serial Plotter Output Example Screenshot.....                       | 10        |
| Processing Example Project to Visualize BPM and IBI.....                    | 10        |
| <b>Free Accessories (Not Included in Kit).....</b>                          | <b>11</b> |
| Table Top Holder and Light Shield.....                                      | 11        |
| Stabilizer Ring.....                                                        | 11        |
| <b>Contact Support.....</b>                                                 | <b>12</b> |
| <b>Compliance and Certifications.....</b>                                   | <b>12</b> |
| <b>Ordering Information.....</b>                                            | <b>13</b> |
| <b>Datasheet Revision History.....</b>                                      | <b>13</b> |

World Famous Electronics llc. New York, USA

[www.PulseSensor.com](http://www.PulseSensor.com)®



# Introduction

Explore heart-rate monitoring and biofeedback creatively with **the Original PulseSensor Kit, a trusted, versatile tool for students, artists, and developers** globally. It's user-friendly and compatible with Arduino, ESP32, micro:bit boards. It is supported by comprehensive example code and documentation, guiding you from basic to advanced applications. In short, it allows you to rapidly create biofeedback devices on any maker platform.

## Technical Overview

The PulseSensor is an affordable optical heart rate sensor (PPG) designed for use with Arduino and other microcontrollers. It uses light transmission to detect changes in blood volume at the fingertip, providing an easy way to measure and track live pulse, beats per minute (BPM), Heart Rate Variability (HRV), and Interbeat Interval (IBI).

## Key Features

- **Reliable and Durable Design:** Built with high-quality materials, the PulseSensor ensures consistent performance and comes with a **2-year hardware warranty**, giving you peace of mind against manufacturing defects.
- **Plug-and-Play Convenience:** Easy to integrate with platforms like Arduino, ESP32, and micro:bit, providing immediate functionality for your projects.
- **Comprehensive Project Support:** Extensive tutorials and code examples are available, with ongoing software updates and **support via GitHub** throughout the product lifecycle.
- **Versatile Applications:** Ideal for wearable health monitors, interactive art installations, and educational projects.
- **Enhanced User Safety:** Designed with safety in mind, featuring skin-friendly materials and easy insulation methods for reliable long-term use.



# The Kit Includes


Included Kit accessories for high-quality sensor readings.

- 1) **Soft braided-copper** core, 26 gauge thickness wires, and **610 mm (24 inches) length**, PVC Insulation.
- 2) An **Ear Clip** that's perfectly sized to the sensor.
- 3) A **Velcro Finger Strap** and **Velcro Dots**
- 4) **Transparent Vinyl Dots**, which make electrical insulation simple.



## Required Electrical Insulation Included

The PulseSensor will not work correctly without insulating the front and back of the circular circuit board with the included kit components. **Some user preparation is required.**


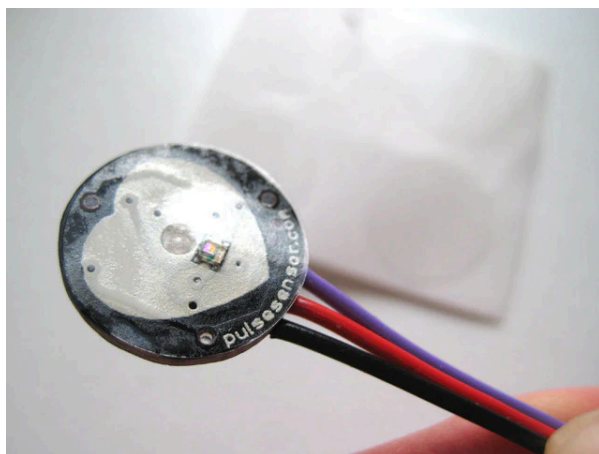


### Vinyl Dots:



Start by Insulating the front from the user's skin with the transparent Vinyl Dots.



Velcro Dot: Insulate the back from any human skin and any electronically connective material, simply by putting velcro backing on the back of the printed circuit board.

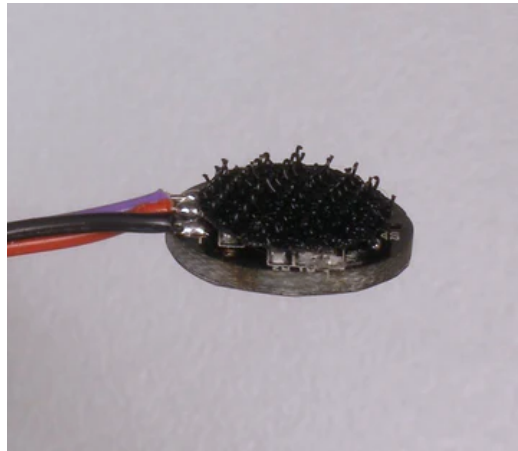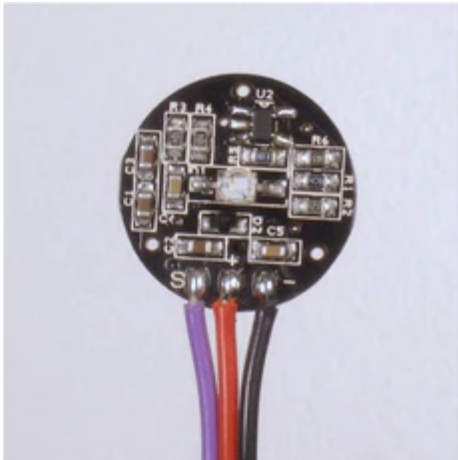

Velcro Strip: Use the Velcro Strip to wear the sensor on a finger tip.

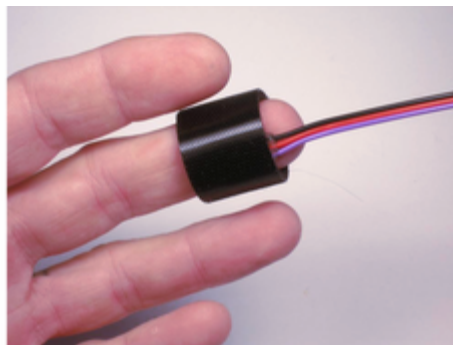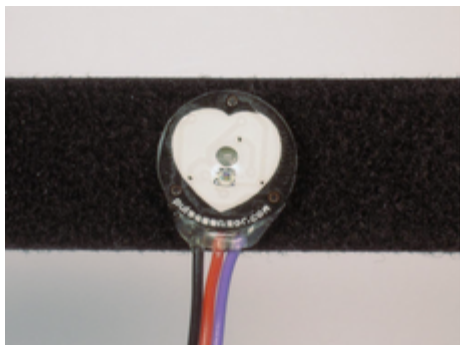

Ear Clip: Or attach the sensor to the included ear clip using hot glue.





# Pin Out/Connector Configuration

The PulseSensor comes with a 3-cable ribbon cable terminating in a male header. The pinout is as follows:

**Purple Wire = Analog  
Pulse Signal (Vdd/2)**

**Red Wire = Vdd,  
Power with 3V or 5V**

**Black Wire = Ground**

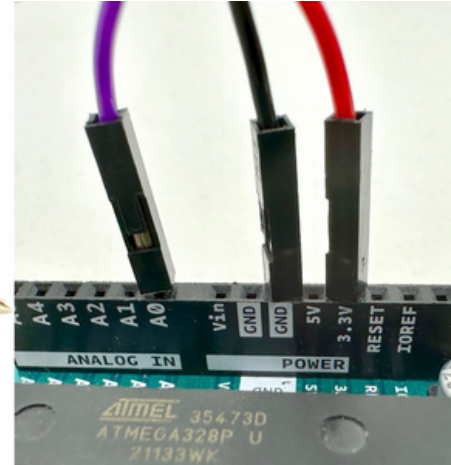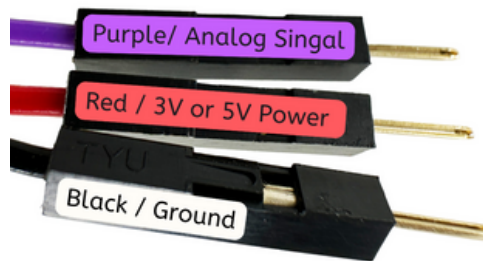


## Electrical Specifications

| Parameter                   | Min | Typ   | Max | Unit      |
|-----------------------------|-----|-------|-----|-----------|
| Operating Temperature Range | -40 |       | +85 | °C        |
| Input Voltage Range         | 3   |       | 5.5 | Volts     |
| Output Voltage Range        | 0.3 | Vdd/2 | Vdd | Volts     |
| Supply Current              | 3   | 4     |     | milliamps |



# Physical Dimensions

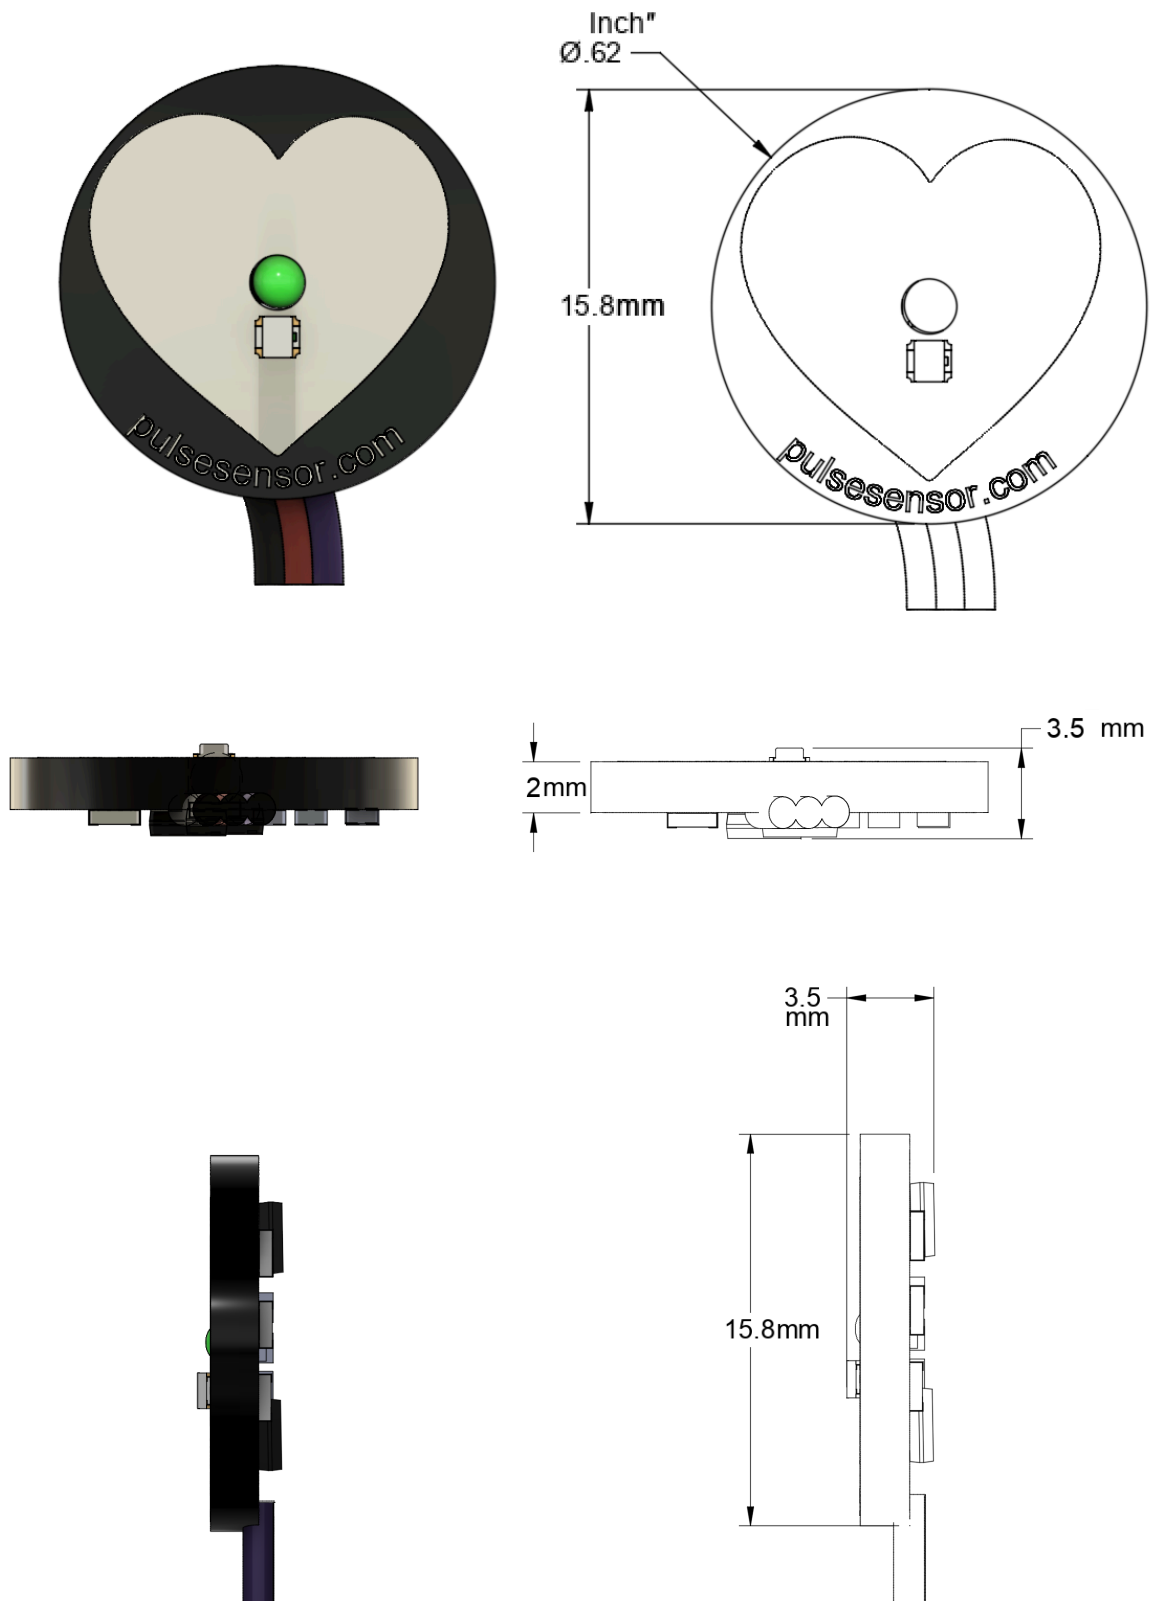


World Famous Electronics Inc. New York, USA

[www.PulseSensor.com](http://www.PulseSensor.com)




# Circuit Diagrams

## Solderless Breadboard Circuit Diagram

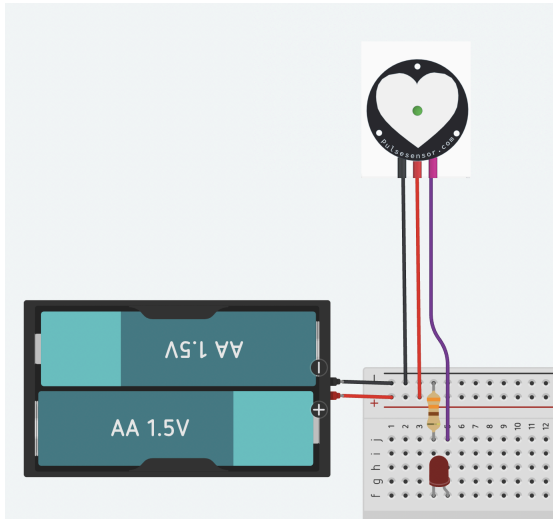

Blink LED with Heartbeat Application


## micro:bit Wiring Diagram

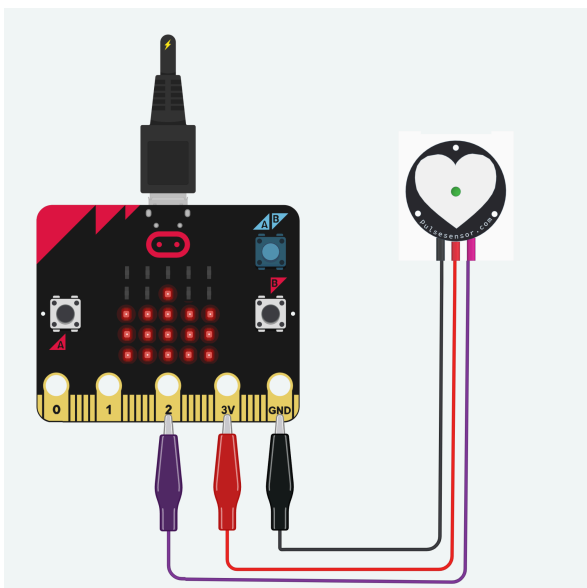

micro:bit (All Versions)





## Arduino Circuit Application Diagrams

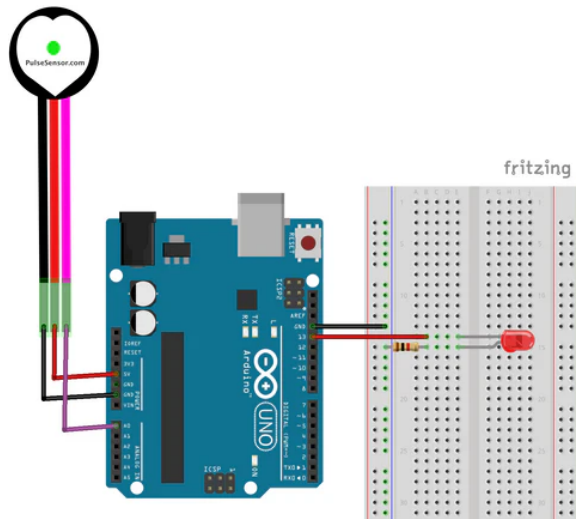

Arduino board Uno Diagram

PulseSensor connected to an Arduino Board

ESP32 BPM WiFi Server circuit diagram

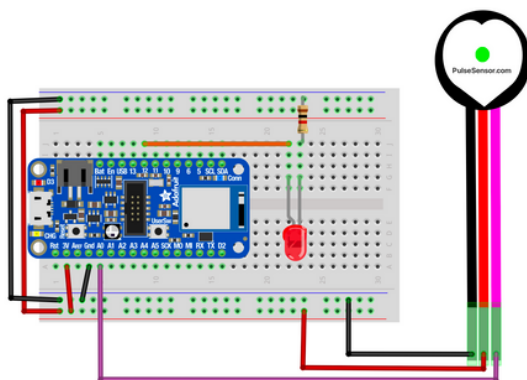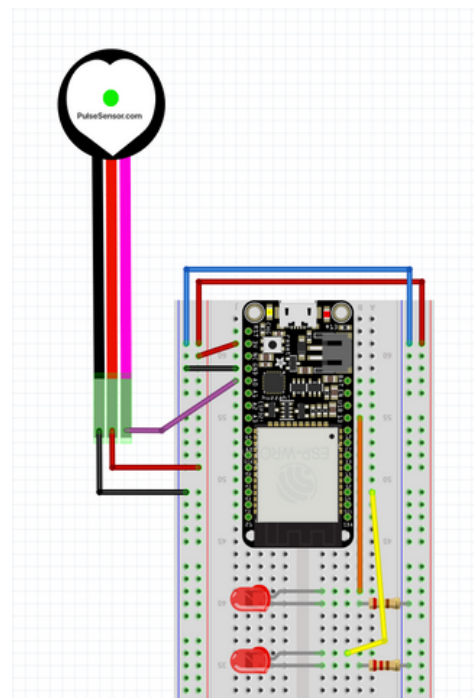

nRF52 BLE Heart Rate Monitor circuit diagram



# Arduino Software Library 2.3.x


## Playground Library 2.3.x

Explore a range of up-to-date PulseSensor code examples, right in the Arduino IDE.


| PulseSensor Playground Code 2.3.0                              | Description                                                                                |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| <a href="#">GettingStartedProject.ino</a>                      | Introductory setup for PulseSensor and Arduino. Basic hardware and library integration.    |
| <a href="#">Getting_BPM_to_Monitor.ino</a>                     | Real-time BPM monitoring on Serial Monitor. Heartbeat alerts. LED visualization on PIN 13. |
| <a href="#">PulseSensor_BPM.ino</a>                            | Standard BPM measurement setup with PulseSensor.                                           |
| <a href="#">PulseSensor_ATtiny85_Serial.ino</a>                | PulseSensor use with ATtiny85, including serial communication.                             |
| <a href="#">PulseSensor_ATtiny85_noSerial.ino</a>              | PulseSensor with ATtiny85, no serial communication.                                        |
| <a href="#">PulseSensor_BPM_UNO_R4_LEDmatrix_Heartbeat.ino</a> | Heartbeat display on LED matrix using UNO R4.                                              |
| <a href="#">PulseSensor_BPM_UNO_R4_LEDmatrix_Plotter.ino</a>   | Plotting heartbeat data on LED matrix with UNO R4.                                         |
| <a href="#">PulseSensor_ESP32.ino</a>                          | PulseSensor integration with ESP32 module.                                                 |
| <a href="#">PulseSensor_PTT.ino</a>                            | Pulse Transit Time functionality based on heart rate.                                      |
| <a href="#">PulseSensor_Servo.ino</a>                          | Controlling a servo based on heart rate data.                                              |
| <a href="#">PulseSensor_Speaker.ino</a>                        | Audio feedback from heart rate data with a speaker.                                        |
| <a href="#">SoftwareSerialDemo.ino</a>                         | Software serial communication with PulseSensor.                                            |
| <a href="#">PulseSensor_nRF52.ino</a>                          | PulseSensor with nRF52 series boards.                                                      |



## Software Visualizers

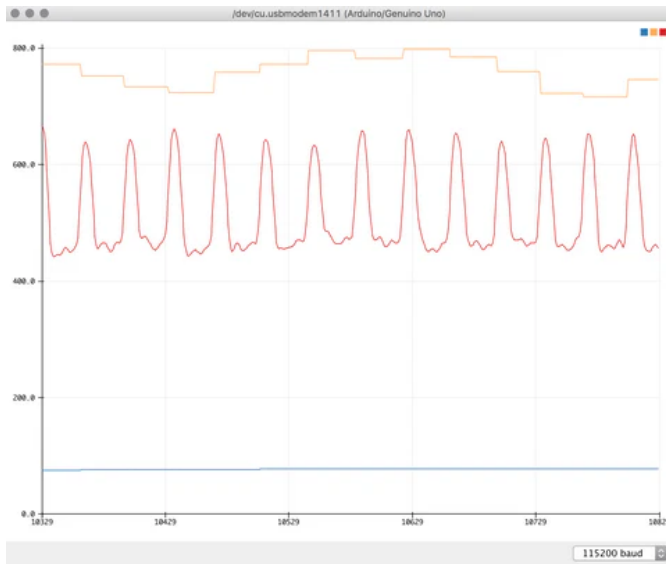

*Arduino Serial Plotter Output Example Screenshot*

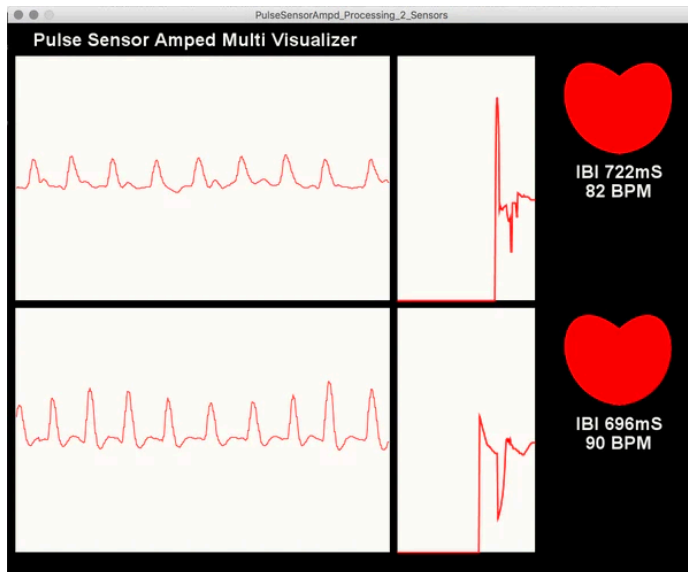


*Processing Example Project to Visualize BPM and IBI.*



## Free Accessories (Not Included in Kit)

Unlock precision and comfort with PulseSensor.com's Table Top Holder and Light Shield along with our Stabilizer Ring—enhance readings, maintain freedom of movement, and 3D print your own today!

### Table Top Holder and Light Shield

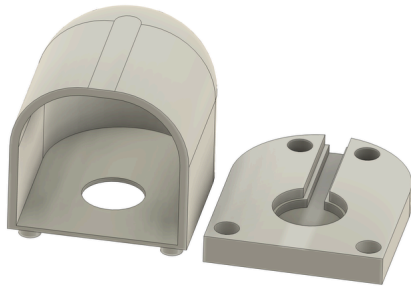

### Stabilizer Ring




# Supplementary Text

Heartbeat Sensor Projects with PulseSensor.  
Prototyping Devices with Biofeedback

Publisher: APESS

By: Yury Gitman and Joel Murphy

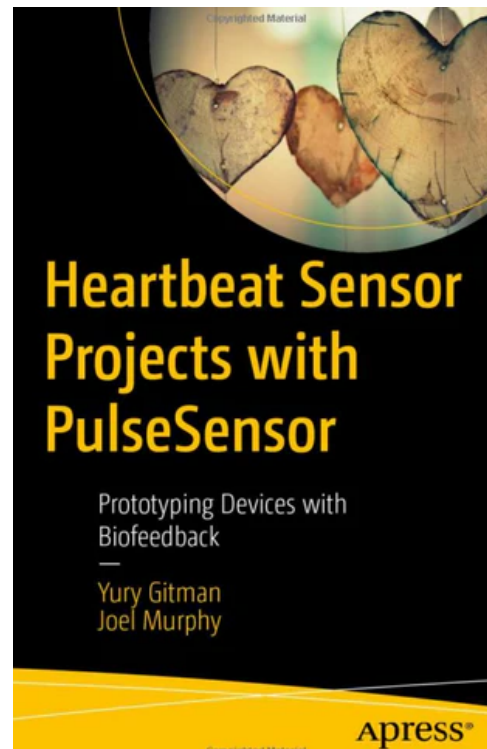

## Contact Support

Email Support: [support@pulsesensor.com](mailto:support@pulsesensor.com)

Arduino Library Support:

<https://github.com/WorldFamousElectronics/PulseSensorPlayground/issues>

## Compliance and Certifications

Certified as Open Source with the Open Source Hardware Association: OSHW US000075

"PulseSensor.com" is a registered trademark of World Famous Electronics LLC. NY, USA

World Famous Electronics llc. New York, USA

[www.PulseSensor.com](http://www.PulseSensor.com)®



# Ordering Information

Universal Product Code (UPC): **864620000204**

Manufacturer: World Famous Electronics llc. New York, USA

Designed in New York City

Made in Taiwan

[www.PulseSensor.com](http://www.PulseSensor.com)®

## Datasheet Revision History

### Revision History

| Revision | Date    | Description                                                              |
|----------|---------|--------------------------------------------------------------------------|
| B        | 2024-11 | Updated datasheet with images based on user feedback and best practices. |
| A        | 2012-09 | Initial Datasheet Release                                                |



Photo of LED13 Blinking  
with a user's heartbeat.

World Famous Electronics llc. New York, USA

[www.PulseSensor.com](http://www.PulseSensor.com)®

